




DIN 908

Verschlusschrauben mit Bund, Innensechskant und zylindrischem Gewinde

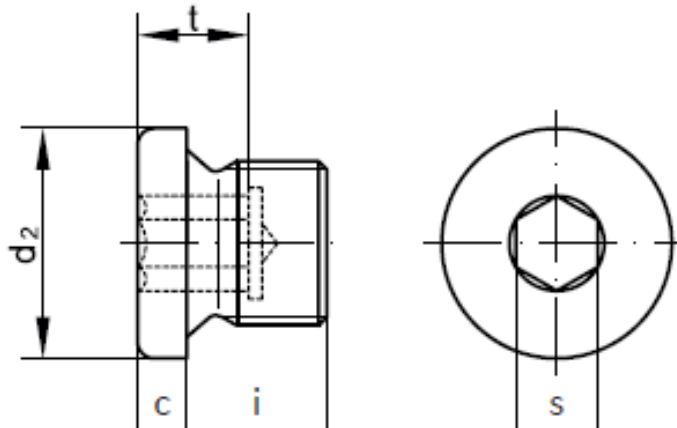

*Abmessung nicht genormt, Richtwerte

Maße	M 8x1*	M 10x1	M 12x1,5	M 14x1,5	M 16x1,5	M 18x1,5	M 20x1,5
s	5	5	6	6	8	8	10
t _{min.}	2,4	5	7	7	7,5	7,5	7,5
d ₂	12	14	17	19	21	23	25
c	3	3	3	4	3	4	4

Maße	M 22x1,5	M 24x1,5	M 26x1,5	M 27x2	M 30x1,5	M 30x2	M 33x2
s	10	12	12	12	17	17	17
t _{min.}	7,5	7,5	9	9	9	9	9
d ₂	27	29	31	32	36	36	39
c	4	4	4	4	4	4	5

Maße	M 36x1,5	M 36x2	M 38x1,5	M 42x1,5	M 45x1,5	M 48x1,5	M 52x1,5
s	19	19	19	22	22	24	24
t _{min.}	10,5	10,5	10,5	10,5	10,5	10,5	10,5
d ₂	42	42	42	49	52	55	60
c	5	5	5	5	5	5	5

Maße	M 52x2	M 56x2	M 64x2	G 1/8 A	G 1/4 A	G 3/8 A	G 1/2 A
s	32	32	32	5	6	8	10
t _{min.}	10,5	14	14	5	7	7,5	7,5
d ₂	64	72	72	14	12	22	26
c	5	5	5	3	3	3	4

Maße	G 3/4 A	G 1 A	G 1 1/8 A	G 1 1/4 A	G 1 1/2 A	G 1 3/4 A	G 2 A
s	12	17	19	22	24	32	32
t _{min.}	9	9	10,5	10,5	10,5	14	14
d ₂	32	39	44	49	55	62	68
c	4	5	5	5	5	5	5

