




DIN 6912

Zylinderschrauben mit Innensechskant,
niedrigem Kopf und Schlüsselführung

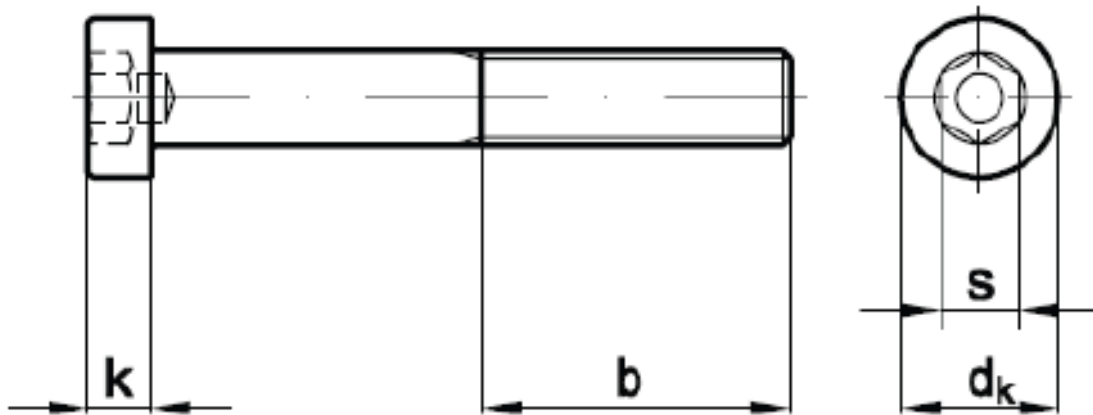

b1 für $l \leq 125$ mm
b2 für $l \leq 200$ mm
b3 für $l > 200$ mm

Maße	M 4	M 5	M 6	M 8	M 10	M 12	M 14
d_1	7	8,5	10	13	16	18	21
k	2,8	3,5	4	5	6,5	7,5	8,5
s	3	4	5	6	8	10	12
b ¹	14	16	18	22	26	30	34
b ²	-	-	-	-	32	36	40
b ³	-	-	-	-	-	-	-

Maße	M 16	M 20	M 22	M 24	M 30	M 36
d_1	24	30	33	36	45	54
k	10	12	13	14	17,5	21,5
s	14	17	17	19	22	27
b ¹	38	46	50	54	66	78
b ²	44	52	56	60	72	84
b ³	57	65	69	73	85	97

